



DEUBLIN

1116 Series "Closed Seal" Rotating Unions for Continuous Coolant Service



- single passage for coolant or MQL
- closed seals for transfer line and similar applications
- full-flow design has no obstructions to trap swarf or debris
- bearing-supported with threaded rotor for easy installation
- deep groove radial ball bearings for smooth operation
- labyrinth system and large vents to protect ball bearings
- balanced mechanical seals made from silicon carbide for long life even under difficult operating conditions
- anodised aluminium housing resists corrosion

Operating Data

Max. Pressure			
Water-based Coolant	1,015 PSI	70 bar	
MQL (oil mist)	145 PSI	10 bar	
Max. Speed	12,000 RPM	12.000 min ⁻¹	
Max. Flow Rate	21.6 GPM	82 l/min	
Max. Temperature	71 °C	> 71 °C consult DEUBLIN	
Filtration	ISO 4406 Class 17/15/12, max. 60 micron		



DO NOT RUN DRY

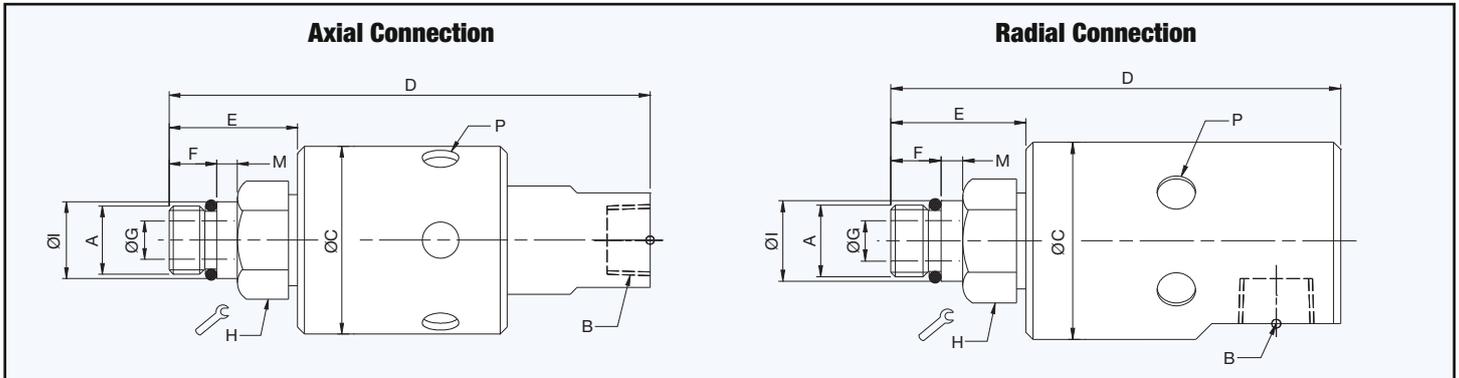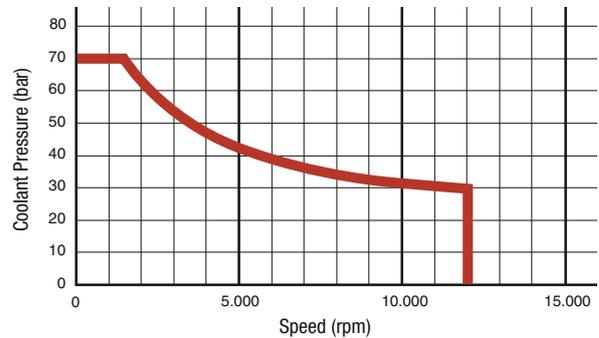

	Ordering Number	B Supply Connection	C Overall Diameter	D Overall Length	P Vent Size Ø (6 x 60°)	A Rotor Connection	E Rotor Length	F Thread Length	G Bore Diameter	H Across Flats	I Pilot Diameter	M Pilot Length
Axial Connection	1116-048-064	1/4 NPT	44	115	9	5/8-18 UNF RH	33	14	9	15/16"	0.6555" / 0.6553"	5
	1116-048-463	1/4 NPT	44	112	9	M16 x 1.5 LH	30	11	9	24	17.993 / 17.988	5
	1116-485-463	G 1/4	44	112	9	M16 x 1.5 LH	30	11	9	24	17.993 / 17.988	5
	1116-580-343	3/8 PT	44	112	9	M12 x 1.25 LH	30	11	6	24	13.994 / 13.989	5
	1116-600-059	3/8 NPT	44	115	9	5/8-18 UNF LH	33	14	9	15/16"	0.6555" / 0.6550"	5
	1116-600-463	3/8 NPT	44	112	9	M16 x 1.5 LH	30	11	9	24	17.993 / 17.988	5
	1116-610-463	G 3/8	44	112	9	M16 x 1.5 LH	30	11	9	24	17.993 / 17.988	5
Radial Connection	1116-090-059	3/8 NPT	44	106	9	5/8-18 UNF LH	33	14	9	15/16"	0.6555" / 0.6553"	5
	1116-090-064	3/8 NPT	44	106	9	5/8-18 UNF RH	33	14	9	15/16"	0.6555" / 0.6553"	5
	1116-090-463	3/8 NPT	44	102	9	M16 x 1.5 LH	30	11	9	24	17.993 / 17.988	5
	1116-516-463*	G 3/8	44	102	9	M16 x 1.5 LH	29	11	9	24	17.993 / 17.988	5
	1116-555-463	G 3/8	44	102	9	M16 x 1.5 LH	29	11	9	24	17.993 / 17.988	5

* Also suitable for Cutting Oil and Air by reduced operating data. For further information please contact DEUBLIN.